


## Flybridge Control Panel (FCP)

## FCP

1)


To install the control panel, choose a location near helmsman's position where convenient for the operator to access and drill two 4 mm (3/16 inch) holes for the threaded rods. Drill a 19 mm (3/4 inch) hole for the connector. Apply sealant around the holes and attach the panel using nuts. If the panel is mounted on flybridge or in an open boat, make sure the holes are watertight.

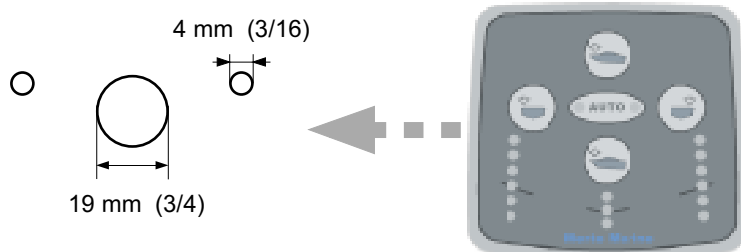

2)

Connect the flybridge control panel to the same ACS terminals as the ordinary panel. Strip the wires 13 mm (0.5 inch). Insert the two wires of the same colour into the supplied ferrules and tighten with the screw connector. No special tools needed!

The yellow, green, brown and white wires are connected to the ACS control unit. If the unit is of type ACS A+ with double power trim, the brown and white wires are connected directly to the battery voltage. See connection diagrams in the user's manual!

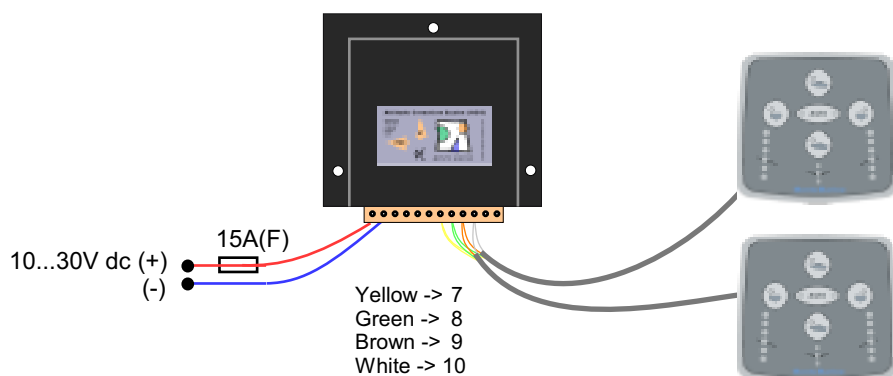

Oy Mente Marine Ab  
P.O. Box 472  
FIN-65101 VAASA  
FINLAND

Tel: +358 (0)6 3178428  
Fax: +358 (0)9 43982741  
[www.mente-marine.com](http://www.mente-marine.com)  
[info@mente-marine.com](mailto:info@mente-marine.com)



[www.mente-marine.com](http://www.mente-marine.com)

*For right attitude!*